

*216 litres model. Part No. 2002961*



*720 litres model. Part No. 2003741*

*Part No. 2003743*


## STANDARD EQUIPMENT

2 Shelves.

## MODELS

| Part No. | Voltage | Capacity litres | Heating rate to reach 100 °C, minutes | Recovery time* minutes | Air exchanges per hour | Height / Width / Depth (interior) cm | Height / Width / Depth (exterior) cm | Number of shelf positions | Power W | Weight Kg |
|---|---|---|---|---|---|---|---|---|---|---|
| 2002961 | 230 / 400 three phase | 216 | 16 | 10 | 12 | 60 60 60 | 87 112 84 | 6 | 4000 | 150 |
| 2002962 | 230 single phase | | | | | | | | | |
| 2002971 | 230 / 400 three phase | 288 | 18 | 10 | 11 | 80 60 60 | 107 112 84 | 8 | 5000 | 161 |
| 2002972 | 230 single phase | | | | | | | | | |
| **DOUBLE DOOR CABINET** | | | | | | | | | | |
| 2003721 | 230 / 400 three phase | 400 | 18 | 13 | 6 | 100 80 50 | 128 132 74 | 10 | 5250 | 200 |
| 2003741 | 230 / 400 three phase | 720 | 19 | 13 | 6 | 120 100 60 | 150 152 80 | 12 | 6000 | 264 |
| 2003743 | 380 / 400 three phase | 4200 | 30 | 13 | 6 | 180 175 135 | 216 231 178 | 10 | 11000 | 1200 |


Energy saving, three phase units are recommended.
*Recovery time, the door was opened for 60 seconds, time taken to recover to the set temperature of 100 °C.
Upon request, large capacity equipment can be manufactured.

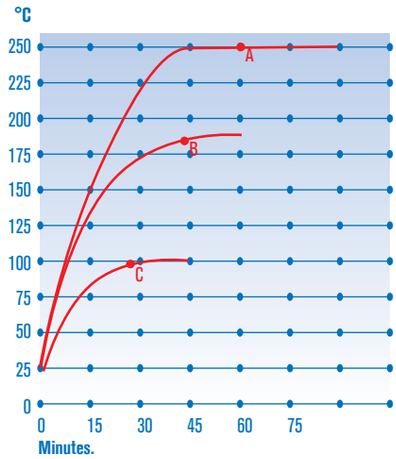


Performance graph of temperature and time.
A. Set at 250 °C: 1 h 6'.
B. Set at 180 °C: 42'.
C. Set at 100 °C: 24'.

## ACCESSORIES

**4.3 inches TFT touch screen.** Must be installed in the factory.
Information and features. See page 146.
Part No. 2000010




## SPARES

**Shelves.**

| Oven Part No. | 2002961/62 | 2002971/72 | 2003721 | 2003741 |
|---|---|---|---|---|
| Shelves | 2000062 | 2000062 | 2000063 | 2000064 |