# Flow cups for measuring liquid viscosity

**CUP Nº 4 STANDARD DIN 53211.**
**CUPS STANDARD ISO 2431.**
**CUP FORD STANDARD ASTM D-1200.**
**CAPACITY: 100ML.**

## FEATURES

Suitable for measuring kinematic viscosities from 5 to 700 cSt, model dependent.
Metallic cups, chrome finished and calibrated.



**Flow cups with handle.**
Models DIN 53211 Nº 4
and Ford ASTM D-1200.




**Flow cups. Standard models.**

**ACCESSORY**
**Support stand with adjustable level.**
Part No. 7001021

## MODELS

| Part No. | Standard | Bore Ø mm | Format | Range cSt | Admisable fall times |
|---|---|---|---|---|---|
| 1000123 | DIN 53211 | 4 | Standard | 90 to 700 | 25” to 100” |
| 1000347 | DIN 53211 | 4 | With handle | 90 to 700 | 25” to 100” |
| 1001013 | ISO 2431 | 3 | Standard | 5 to 42 | 30” to 100” |
| 1001014 | ISO 2431 | 4 | Standard | 35 to 135 | 30” to 100” |
| 1001015 | ISO 2431 | 5 | Standard | 100 to 350 | 30” to 100” |
| 1001016 | ISO 2431 | 6 | Standard | 190 to 680 | 30” to 100” |
| 1000705 | ASTM D-1200 | 3.40 | Standard | 40 to 220 | 20” to 100” |
| | | 4.12 | | 70 to 370 | 20” to 100” |
| | | 2.53 | | 25 to 120 | 20” to 100” |
| 1000707 | ASTM D-1200 | 3.40 | With handle | 40 to 220 | 20” to 100” |
| | | 4.12 | | 70 to 370 | 20” to 100” |

**Comes with a calibration certificate with results traceable to know standards and equipment**

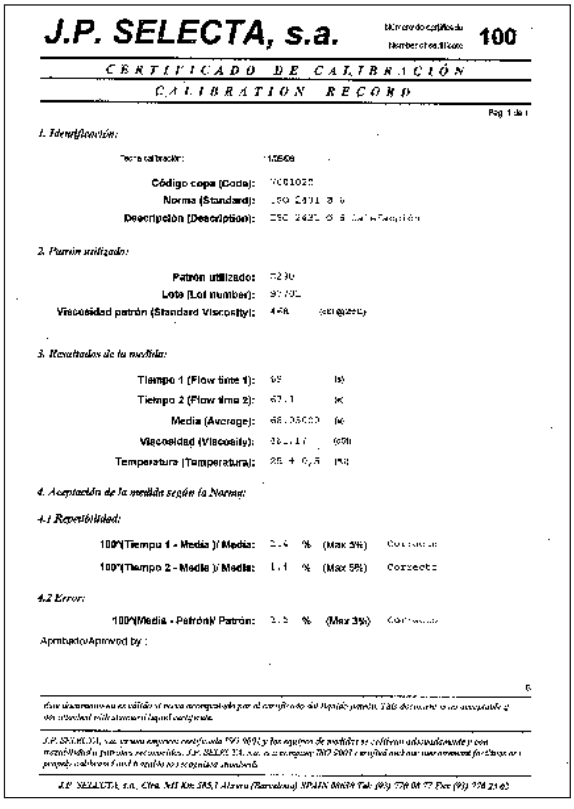

J.P. SELECTA, s.a.

CERTIFICADO DE CALIBRACIÓN
CALIBRATION RECORD