## Ink Printer “Microprinter”




**APPLICATIONS**

Small ribbon printer (not thermal) with paper roll 2 1/4" (56 mm) wide.
Interface connection: RS232.
Applications: Measuring equipment, pH meters, conductivity meters, spectrophotometers, etc.
Includes interface cable and power transformer 5V - 3A and cable.

**MODEL**

| Part No. | Height / Width / Depth cm | | | Power supply | Weight Kg |
|---|---|---|---|---|---|
| 4120113 | 4 | 16 | 10 | DC 5V 3A | 1 |

## Automatic programmer “Promat” 24 H



Connects and disconnects electrical power by a pre-programmed timer switch.
Adjustable timer: Cycles up to 24 hours, with controllable connection disconnection up to every 15 minutes.
Manual interrupt setting to disconnect the program, luminous indicator shows when power is being applied.
Maximum current: 16 Amp.
Part No. 1000500

## Timer alarm “Relavis”

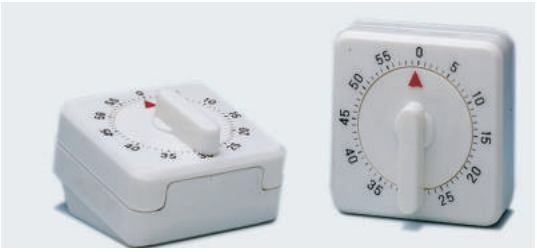

Audible sound when the program time has lapsed.
Time setting from 0 to 60 minutes in 1 minute intervals.
Part No. 5900499

## Digital alarm timer “Count Down-Up”




Maximum count time 99 min. 59 sec. Timer: count-down and count-up.
Portable: table top with magnetic holder or clip if used on a pocket or overall.
Audible alarm fitted.
Part No. 5900500

## Digital Chronometer “Diamond”



Maximum timer: 23 hr 59 min 59 sec. Division 1/100 seconds. Control: LAP/SPLIT (timer: split time and accumulative time).
Date incorporated.
Audible Alarm (duration 60 seconds).
Audible Alarm "snooze" function (once pressed the stop alarm goes off every 5 minutes until it is completely shut off).
Part No. 5900501

## Thermometer reader “T101”

**FOR TEMPERATURE MEASUREMENT FROM –50 °C TO +300 °C OR FROM –58 °F TO +572 °F.**

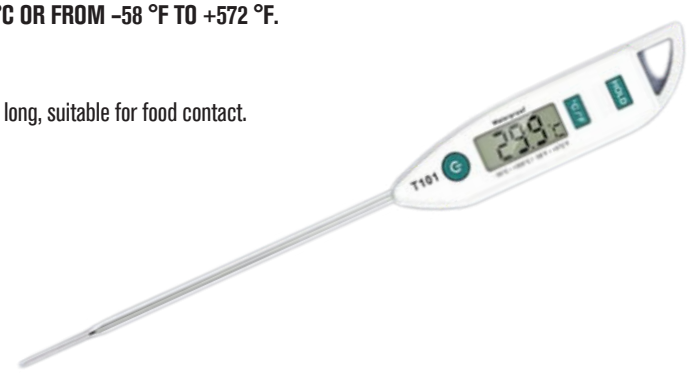


Applications: kitchen, food, water, wax, barbecues, candles, liquids in general.
Digital display with readings in °C or °F.304 stainless steel penetration probe, 12.7 cm long, suitable for food contact.
Fast response time: 2–4 seconds. HOLD function (data retention).
Resolution: 0.1 °C / 0.1 °F.
IPX7 waterproof: washable under running water (do not immerse in hot water).
Automatic shut-off after 10 minutes of inactivity (can be disabled).
Powered by 1 × LR44 battery (1.5 V)..

**MODEL**

| Part No. | Precision | Resolution |
|---|---|---|
| 5903029 | ±1 °C / ±1,8 °F | 0,1 °C / 0,1 °F |

Includes a protective probe cover with clip and hanging hole.